


# TECHNICAL FILE - 30MM AXLE OPTIONS

We provide 3 different stiffness axles all in one length length.

## 30MM AXLE OPTIONS

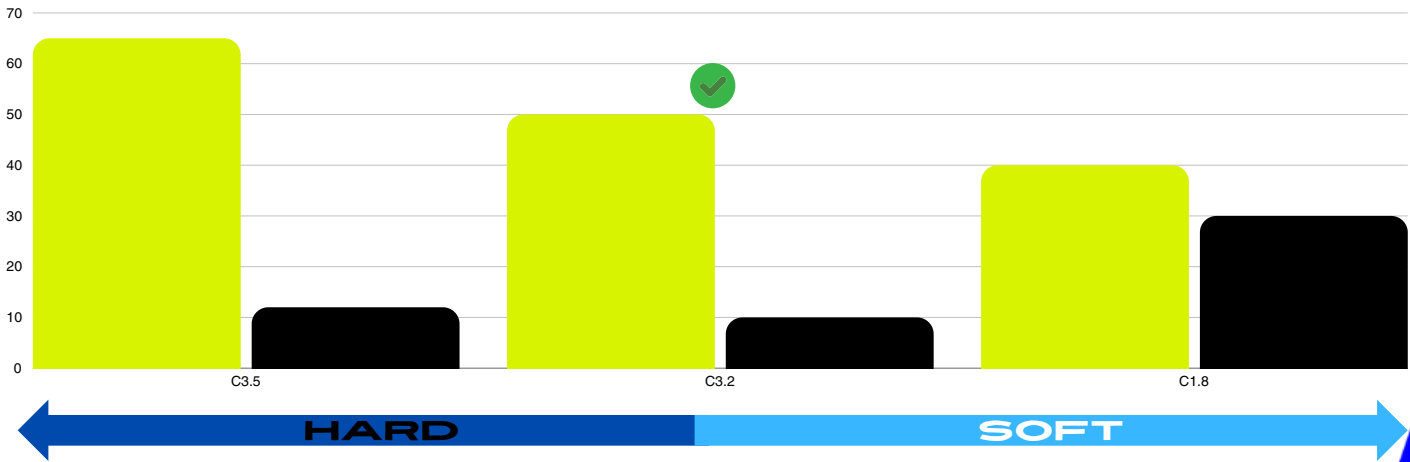

All COMPKART chassis models fitted with the a 30mm axle come standard with our C 3.2 axle at 960mm length. Owners have the opportunity to increase chassis performance by selecting from our different stiffness/elasticity options as well as lengths. A harder axle selection will provide less movement at the rear of your chassis and the opposite if a softer axle is selected, competitors can best decide which option will suit their application and track conditions the best.

Race Dept. Tip 02



We utilize the C3.2 axle most of the time, in the case where the grip of the track increases we typically alter the rear hub length and material leaving the axle standard. Additionally its possible in the RANGER 28 to find a different balance by adjusting the rear ride height which generally will provide more of a difference than an axle change.

