


## TECHNICAL FILE - SEAT 4R MODEL

COMPKART 4R model chassis is designed for usage in four-cycle as well as lower two-cycle applications such as 100cc categories


### STANDARD SEAT

COMPKART ES (extra Soft) size - 1, 2, 3, 4



### TOOLS REQUIRED

- Drill
- 8mm Drill Bit
- 5mm Allen Key
- 13mm Wrench
- Seat Jig

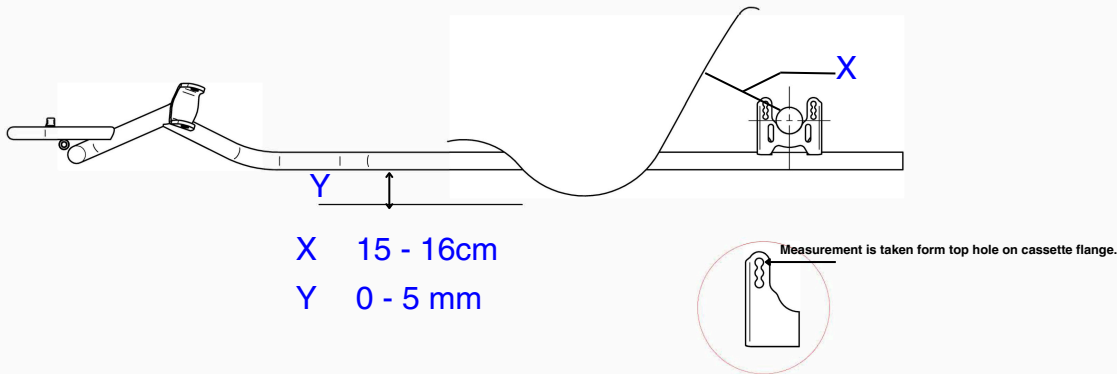

Regardless of seat size and type - 15cm is the recommended as the base setting for all applications. Increasing the measurement from 15cm will increase the weight distribution the front of the chassis, thus increasing front-end positivity and reducing rear-end balance and braking stability. We also recommend to install one external seat stay on the brake side and one seat stay on the engine side for the best performance.

For better driver fitment we provide the following items in our catalogue:

Adjustable Pedal Box | PN: C.10.15721.00

Steering Spacer Inclined | PN: C.20.12348.00-NE

Race Dept. Tip 01



We recommend using specialized Compkart seat mounting washers. Available in both 2mm and 5mm thickness.

2mm | PN: C.J32X51.NE | .BL

5mm | PN: C.J3C5X51.NE | .BL

