

# TECHNICAL FILE - SEAT COVERT 3.0 MODEL

COVERT 3.0 model chassis is CIK-FIA homologated and designed to be utilized in ROTAX, X30, OK competitions.

## STANDARD SEAT

COMPKART ES (extra Soft) size - 1, 2, 3, 4


## OPTION SEAT

TILLET T-11 (VG)




### TOOLS REQUIRED

- Drill
- 8mm Drill Bit
- 5mm Allen Key
- 13mm Wrench
- Seat Jig

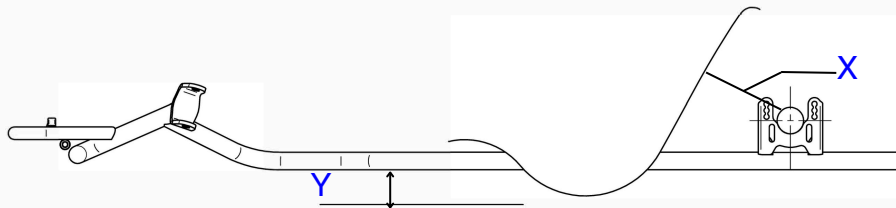

X 14cm  
Y 0 - 5 mm



Measurement is taken from top hole on cassette flange.

Regardless of seat size and type - 14cm is the recommended setting for all applications. Increasing the measurement from 14cm will increase the weight distribution the front of the chassis, thus increasing front-end positivity and reducing rear-end balance and braking stability. We also recommend to install two external seat stays on the brake side and one seat stay on the engine side for the best performance.

For better driver fitment we provide the following items in our catalogue:

Steering Stem 520mm | PN: C.10.14930.00  
Adjustable Pedal Box | PN: C.10.15721.00  
Steering Spacer Inclined | PN: C.20.12348.00-NE

Race Dept. Tip 01



We recommend using specialized Compkart seat mounting washers. Available in both 2mm and 5mm thickness.

2mm | PN: C.J32X51.NE | .BL  
5mm | PN: C.J3C5X51.NE | .BL



@COMPAKRT